
Flat dies machines for screws and special threads

multifunction with SM3 pointing machine and RS12 rotary unit RP12 MF

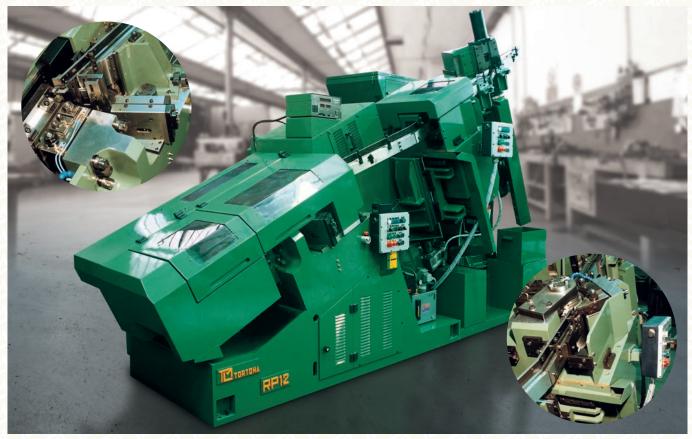

The machine described is a multifunctional machine capable of performing many operations on special parts. Specifically, it performs a first operation of chamfering or pointing followed by a first rolling and then a final rolling of the screw. All the operations preceding pointing, such as assembly of one or more washers, are performed by units that are positioned in such a way that, as they can be shifted to the side of the machine and by-passed with extra guides, they make it possible to pass from production of special screws to production of normal screws. The versatility of this machine enables our clients to achieve the maximum productivity and exploit the latest progress in the evolution of "Fasteners Producers".

Technical features: approximate values. The machine speed can change according to the material used and the type of item to be rolled. Measures in mm.

Output capacity	Diameter of screw	Min. Ler	igth Max	. Length	Machine sizes with hood for total soundproofing			
min 180 max 220	12	20		90	A 1830 - B 1603 - C 1410 A 1830 - B 1980			
otary unit RS1	2		5	5				
Output capacity	Diameter of screw	Length of thread	Max length of shank underhead	tool sizes		Net weight approx	Machine Sizes	Machine sizes with hood for total soundproofinę
min 180 max 220	min 5 max 12	min 5 max 60	100	280x60	HP 15	Kg. 2200	1800x900 x1700	A 4120 - B 1020 - C 259 D 753.12 - H 1630
otary unit RP1	2	THA	TP	TP	E A TE			TEATEA
Output capacity	Diameter of screw	Length of thread	Max length of shank underhead	tool sizes	nower	Net weight approx	Machine Sizes	Machine sizes with hood for total soundproofing
min 60 max 220	min 6 max 12	min 15 max 95	180	216x190x8 Sp.36,5	- HP 20	Kg. 5450	2670x1560 x1890	A 4120 - B 1020 - C 25 D 753.12 - H 1630

T.L.M. srl viale Mariano Dellepiane, 10/L 15057 Tortona (AL) ITALY tel+39 0131 813043 fax+39 0131 814456 info@tlmweb.it www.tlmweb.it

