



# Chamfering machines for production of points and special pieces

## SM5





The chamfering machines can work at the highest production speeds with a careful fastening of the workpieces to prevent its rotation during the working. The machine can be delivered separately or coupled with a rolling machine and it is assembled

before it to spare many passages of the screw. Possibility of producing screws with length 250/300 mm on SM3 to SM5 pointing machines by means of use of optional equipment and automated motorisations.

### Optional configurable equipment on SM:

- Mandrel and obtained component position display and memorisation
- piece scrap when drilling is not successful
- arrangement of pressure control instrument installation

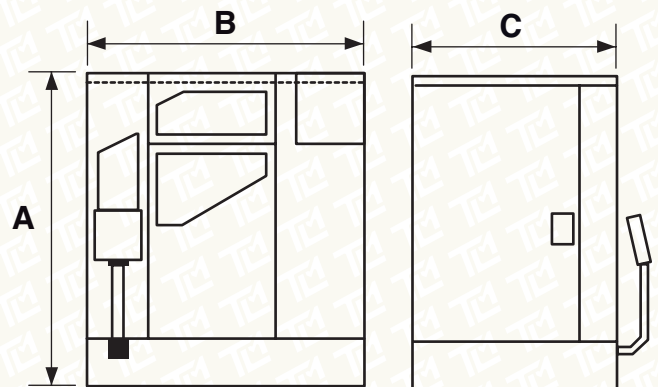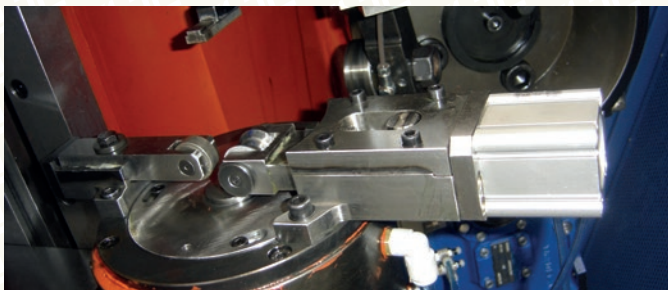

**Technical features: approximate values.** The machine speed can change according to the material used and the type of item to be rolled. Measures in mm.

Output pieces per minute	Blanks diameter	Under head shank length	Total power	Cone spindle	Net weight	Machine sizes including the system for total soundproofing
120/130	min 10 max 20/24	min 30/40 max 200/300	HP 20	ISO 40	Kg. 3800	A 2220 - B 1420 C 1230